


Application

U-Shape acrylic diffuser luminaires are suitable for applications requiring decorative and uniform light distribution, such as condominiums, corridors, and staircase areas



Specification

- Housing:** Die-formed cold-rolled steel sheet 0.6 mm thickness
- Finishing:** Polyester powder coated
- Diffuser:** Acrylic diffuser (Opal, Clear, or Prismatic options available)
- Mounting:** Surface and suspension rod mounting
- Lamp Holder:** G13 rotary lock types with TIS standard
- Wiring:** THW 1.0 sqmm with TIS standard
- Light Source:** LED T8 Lamps
- IP Rating:** IP20

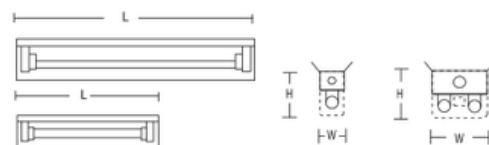

Model	Light Source	Dimensions (mm)		
		W	L	H
TU-12	1 x LED T8 L 600 mm	70	620	100
TU-22	2 x LED T8 L 600 mm	195	620	85
TU-14	1 x LED T8 L 1200 mm	70	1224	100
TU-24	2 x LED T8 L 1200 mm	195	1224	85