

Application

Asymmetrical batten luminaires are suitable for applications requiring directional lighting in one direction, such as wall washing, signboard lighting, and low-height installations.



Specification

Housing: Die-formed cold-rolled steel sheet 0.6 mm thickness

Finishing: Polyester powder coated


Mounting: Surface and suspension rod mounting

Lamp Holder: G13 spring loaded types with TIS standard

Wiring: THW with TIS standard

Light Source: LED T8 Lamps

IP Rating: IP20

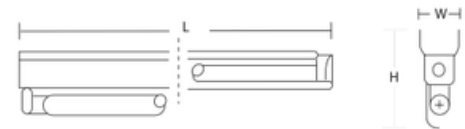

Model	Light Source	Dimensions (mm)		
		W	L	H
TD-12	1 x LED T8 L 600 mm	50	620	95
TD-14	1 x LED T8 L 1200 mm	50	1224	95