



Application

Panel luminaires are designed to create a modern and professional look, offering a versatile lighting solution for office, educational, industrial, and commercial applications.

Specification

Housing:	Die-Cast Aluminium
Finishing:	Powder Coated in White
Mounting:	Recessed mounting with bracket option
Diffuser:	PS diffuser (Polystyrene)
CCT:	3000K (Warm White), 4000K (Cool White), 6500K (Daylight)
Light Source:	LED SMD Module
Control system:	Built-in OSRAM Optotronic driver
Lifetime:	50,000 Hrs
UGR Rating:	< 19 (Optional)
IP Rating:	IP20
Option:	Dimmable

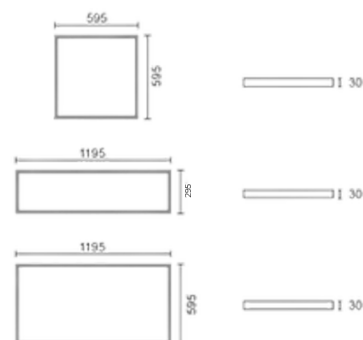

Model	Power (W)	Luminaire Efficiency (lm)	Efficiency (lm/W)	Size (mm)		
				W	L	H
TPLN-40SW	40	4000	100	595	595	30
TPLN-50SW	50	5000	100	295	1195	30
TPLN-60SW	60	6000	100	595	1195	30