

Application

Scala luminaire is suitable for areas requiring glare reduction and uniform light distribution, such as schools, restaurants, shopping centers, condominiums, and other commercial spaces.



Specification

Housing: Die-formed cold-rolled steel sheet 0.6 mm thickness

Finishing: Polyester powder coated

Louver: Silver coated ABS


Mounting: Surface mounting

Lamp Holder: G13 spring loaded types with TIS standard

Wiring: THW with TIS standard

Light Source: LED T8 Lamps

IP Rating: IP20

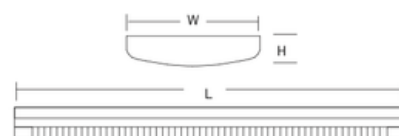

Model	Light Source	Dimensions (mm)		
		W	L	H
TSC-22	2 x LED T8 L 600 mm	220	655	66
TSC-24	2 x LED T8 L 1200 mm	220	1245	66