


Application

Surface Profile Mirror Louver luminaires are suitable for offices, schools, healthcare facilities, libraries, and other workspaces where high illumination levels, energy efficiency, glare control, and uniform lighting are required.



Specification

- Housing:** Die-formed cold-rolled steel sheet 0.6 mm thickness
- Finishing:** Polyester powder coated
- Reflector:** Mirror anodized aluminium reflector with 87% reflectance (95% optional)
- Louver:** Mirror anodized aluminium louver with Christmas tree profile for glare control
- Mounting:** Surface and suspension rod mounting
- Lamp Holder:** G13 rotary lock types with TIS standard
- Wiring:** THW 1.0 sqmm with TIS standard
- Light Source:** LED T8 Lamps
- IP Rating:** IP20

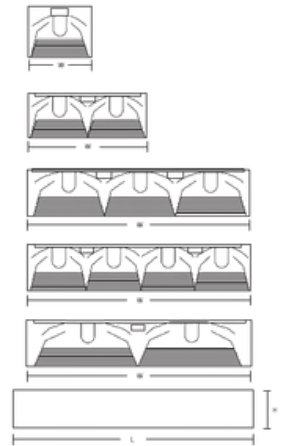

Model	Light Source	Dimensions (mm)		
		W	L	H
TO-12L	1 x LED T8 L 600 mm	150	615	77
TO-22L	2 x LED T8 L 600 mm	300	615	77
TO-32L	3 x LED T8 L 600 mm	600	615	77
TO-42L	4 x LED T8 L 600 mm	600	615	77
TO-12LX	1 x LED T8 L 600 mm	300	615	77
TO-22LX	2 x LED T8 L 600 mm	600	615	77
TO-14L	1 x LED T8 L 1200 mm	150	1224	77
TO-24L	2 x LED T8 L 1200 mm	300	1224	77
TO-34L	3 x LED T8 L 1200 mm	600	1224	77
TO-44L	4 x LED T8 L 1200 mm	600	1224	77
TO-14LX	1 x LED T8 L 1200 mm	300	1224	77
TO-24LX	2 x LED T8 L 1200 mm	600	1224	77