



Application

Recessed Double Parabolic Louver (T-Bar) luminaires are suitable for offices, schools, hospitals, and commercial spaces where high illumination levels, energy efficiency, glare control, and uniform lighting are required.

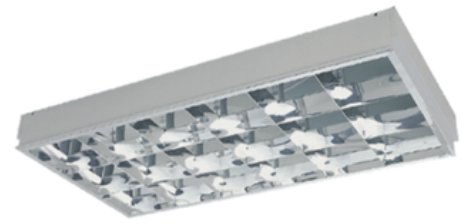

Specification

- Housing:** Die-formed cold-rolled steel sheet 0.6 mm thickness
- Finishing:** Polyester powder coated
- Reflector:** Mirror anodized aluminium reflector with 87% reflectance (95% optional)
- Louver:** Mirror anodized aluminium double parabolic louver for glare control
- Mounting:** Recessed mounting for T-bar ceiling and gypsum ceiling
- Lamp Holder:** G13 rotary lock types with TIS standard
- Wiring:** THW 1.0 sqmm with TIS standard
- Light Source:** LED T8 Lamps
- IP Rating:** IP20



Model	Light Source	Dimensions (mm)				
		W1	W2	L1	L2	H
TMD-12L	1 x LED T8 L 600 mm	130	150	622	580	77
TMD-12LX	1 x LED T8 L 600 mm	280	297	622	580	77
TMD-22L	2 x LED T8 L 600 mm	280	297	622	580	77
TMD-22LX	2 x LED T8 L 600 mm	580	597	622	580	77
TMD-32L	3 x LED T8 L 600 mm	580	597	622	580	77
TMD-42L	4 x LED T8 L 600 mm	580	597	622	580	77
TMD-14L	1 x LED T8 L 1200 mm	130	150	1222	1180	77
TMD-14LX	1 x LED T8 L 1200 mm	280	297	1222	1180	77
TMD-24L	2 x LED T8 L 1200 mm	280	297	1222	1180	77
TMD-24LX	2 x LED T8 L 1200 mm	580	597	1222	1180	77
TMD-34L	3 x LED T8 L 1200 mm	580	597	1222	1180	77
TMD-44L	4 x LED T8 L 1200 mm	580	597	1222	1180	77