


Application

Surface Profile Mirror Louver luminaires are suitable for offices, schools, hospitals, and commercial spaces where high illumination levels, energy efficiency, glare control, and uniform lighting are required.



Specification

Housing:	Die-formed cold-rolled steel sheet 0.6 mm thickness with extruded aluminium trim
Finishing:	Polyester powder coated
Reflector:	Mirror anodized aluminium reflector with 87% reflectance (95% optional)
Louver:	Mirror anodized aluminium louver with Christmas tree profile for glare control
Mounting:	Surface mounting
Lamp Holder:	G13 rotary lock types with TIS standard
Wiring:	THW 1.0 sqmm with TIS standard
Light Source:	LED T8 Lamps
IP Rating:	IP20

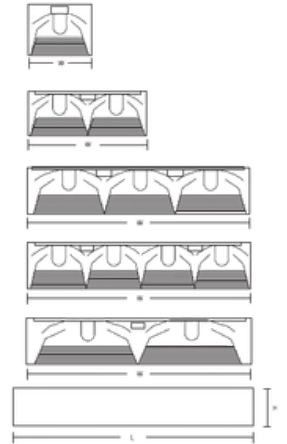

Model	Light Source	Dimensions (mm)		
		W	L	H
TOE-12L	1 x LED T8 L 600 mm	150	615	77
TOE-22L	2 x LED T8 L 600 mm	300	615	77
TOE-32L	3 x LED T8 L 600 mm	600	615	77
TOE-42L	4 x LED T8 L 600 mm	600	615	77
TOE-12LX	1 x LED T8 L 600 mm	300	615	77
TOE-22LX	2 x LED T8 L 600 mm	600	615	77
TOE-14L	1 x LED T8 L 1200 mm	150	1224	77
TOE-24L	2 x LED T8 L 1200 mm	300	1224	77
TOE-34L	3 x LED T8 L 1200 mm	600	1224	77
TOE-44L	4 x LED T8 L 1200 mm	600	1224	77
TOE-14LX	1 x LED T8 L 1200 mm	300	1224	77
TOE-24LX	2 x LED T8 L 1200 mm	600	1224	77