


Application

Recessed Profile Mirror Louver luminaires are suitable for offices, schools, hospitals, and commercial spaces where high illumination levels, energy efficiency, glare control, and uniform lighting are required.



Specification

- Housing:** Die-formed cold-rolled steel sheet 0.6 mm thickness with extruded aluminium trim
- Finishing:** Polyester powder coated
- Reflector:** Mirror anodized aluminium reflector with 87% reflectance (95% optional)
- Louver:** Mirror anodized aluminium louver with Christmas tree profile for glare control
- Mounting:** Recessed mounting for T-bar ceiling and gypsum ceiling
- Lamp Holder:** G13 rotary lock types with TIS standard
- Wiring:** THW 1.0 sqmm with TIS standard
- Light Source:** LED T8 Lamps
- IP Rating:** IP20

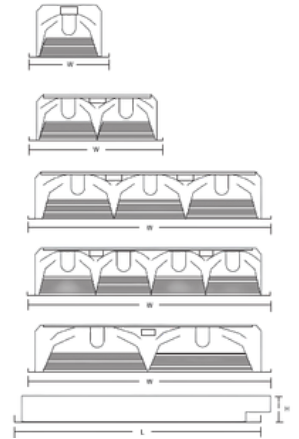

Model	Light Source	Dimensions (mm)		
		W	L	H
TME-12L	1 x LED T8 L 600 mm	150	597	77
TME-22L	2 x LED T8 L 600 mm	297	597	77
TME-22LX	2 x LED T8 L 600 mm	597	597	77
TME-32L	3 x LED T8 L 600 mm	597	597	77
TME-42L	4 x LED T8 L 600 mm	597	597	77
TME-14L	1 x LED T8 L 600 mm	150	1197	77
TME-24L	2 x LED T8 L 1200 mm	297	1197	77
TME-24LX	2 x LED T8 L 1200 mm	597	1197	77
TME-34L	3 x LED T8 L 1200 mm	597	1197	77
TME-44L	4 x LED T8 L 1200 mm	597	1197	77