


Application

Surface Acrylic Diffuser luminaires are suitable for hospitals, schools, offices, and commercial spaces where low glare and uniform light distribution are required.



Specification

- Housing:** Die-formed cold-rolled steel sheet, 0.6 mm thickness
- Finishing:** Polyester powder coated
- Reflector:** Mirror anodized aluminium reflector with 87% reflectance (95% optional)
- Diffuser:** Acrylic diffuser (opal, clear, or prismatic optional)
- Mounting:** Surface and suspension rod mounting
- Lamp Holder:** G13 rotary lock types with TIS standard
- Wiring:** THW 1.0 sqmm with TIS standard
- Light Source:** LED T8 Lamps
- IP Rating:** IP20

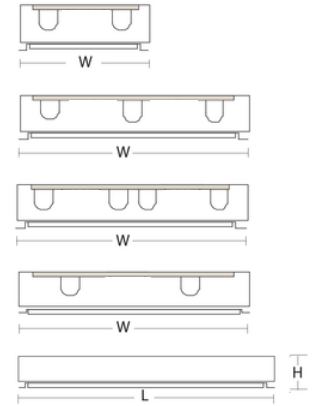

Model	Light Source	Dimensions (mm)		
		W	L	H
TOPF-12PS	1 x LED T8 L 600 mm	150	616	84
TOPF-12PSX	1 x LED T8 L 600 mm	300	616	85
TOPF-22PS	2 x LED T8 L 600 mm	300	616	85
TOPF-22PSX	2 x LED T8 L 600 mm	600	616	85
TOPF-32PS	3 x LED T8 L 600 mm	600	616	85
TOPF-42PS	4 x LED T8 L 600 mm	600	616	85
TOPF-14PS	1 x LED T8 L 1200 mm	150	1224	84
TOPF-14PSX	1 x LED T8 L 1200 mm	300	1224	85
TOPF-24PS	2 x LED T8 L 1200 mm	300	1224	85
TOPF-24PSX	2 x LED T8 L 1200 mm	600	1224	85
TOPF-34PS	3 x LED T8 L 1200 mm	600	1224	85
TOPF-44PS	4 x LED T8 L 1200 mm	600	1224	85