


TEI Recessed Acrylic Diffuser Luminaire

Application

Recessed acrylic diffuser luminaires are designed for general indoor lighting applications such as hospitals, schools, offices, and commercial buildings where soft and uniform illumination is required. The fixture can be installed on gypsum ceilings or T-bar ceiling systems.

Specification

- Housing:** Die-formed cold-rolled steel sheet 0.6 mm thickness
- Finishing:** Polyester powder coated
- Diffuser:** Opal acrylic diffuser
- Mounting:** Recessed mounting for T-bar ceiling and gypsum ceiling
- Lamp Holder:** G13 rotary lock types with TIS standard
- Wiring:** THW 1.0 sqmm with TIS standard
- Light Source:** LED T8 Lamps
- IP Rating:** IP20

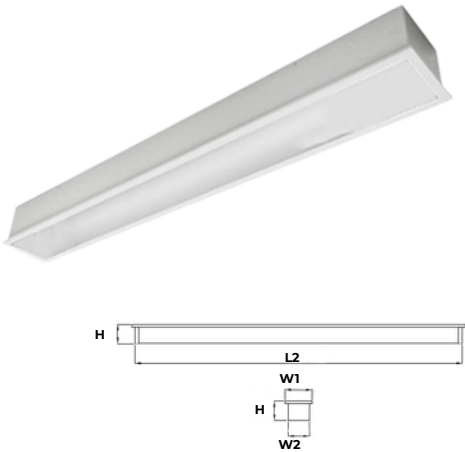

Model	Light Source	Dimensions (mm)				
		W1	W2	L1	L2	H
TRLI-12O	1 x LED T8 L 600 mm	90	75	640	625	90
TRLI-22O	2 x LED T8 L 600 mm	145	125	640	625	70
TRLI-14O	1 x LED T8 L 1200 mm	90	75	1240	1225	90
TRLI-24O	2 x LED T8 L 1200 mm	145	125	1240	1225	70