

Application

Pendant acrylic diffuser luminaires are designed for decorative and functional lighting in areas where visual comfort and aesthetic appearance are required. Suitable for applications such as shopping malls, office buildings, showrooms, retail stores, and other commercial interior spaces.

Specification

Housing: Die-formed cold-rolled steel sheet 0.6 mm thickness

Finishing: Polyester powder coated

Diffuser: Opal acrylic diffuser



Mounting: Surface and suspension rod mounting

Lamp Holder: G13 rotary lock types with TIS standard

Wiring: THW 1.0 sqmm with TIS standard

Light Source: LED T8 Lamps

IP Rating: IP20

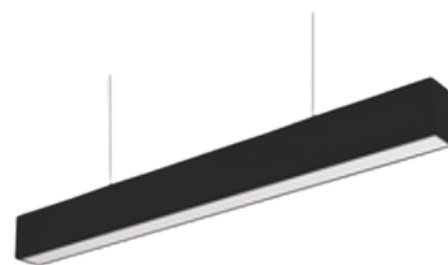

Model	Light Source	Dimensions (mm)		
		W	L	H
TSLI-12O	1 x LED T8 L 600 mm	80	623	85
TSLI-22O	2 x LED T8 L 600 mm	80	623	85
TSLI-14O	1 x LED T8 L 1200 mm	80	1223	85
TSLI-24O	2 x LED T8 L 1200 mm	80	1223	85