


Application

U-Shape acrylic diffuser luminaires are suitable for applications requiring decorative and uniform light distribution, such as condominiums, corridors, and staircase areas



Specification

- Housing:** Die-formed cold-rolled steel sheet 0.6 mm thickness
- Finishing:** Polyester powder coated
- Diffuser:** Acrylic diffuser (Opal, Clear, or Prismatic options available)
- Mounting:** Surface and suspension rod mounting
- Lamp Holder:** G5 rotary lock types with TIS standard
- Wiring:** THW 1.0 sqmm with TIS standard
- Light Source:** LED T5 Lamps
- IP Rating:** IP20

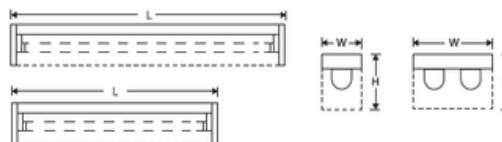

Model	Light Source	Dimensions (mm)		
		W	L	H
TU-114	1 x LED T5 L 600 mm	50	575	75
TU-214	2 x LED T5 L 600 mm	100	575	75
TU-128	1 x LED T5 L 1200 mm	50	1175	75
TU-228	2 x LED T5 L 1200 mm	100	1175	75