



Application

Surface Profile Mirror Louver luminaires are suitable for offices, schools, healthcare facilities, libraries, and other workspaces where high illumination levels, energy efficiency, glare control, and uniform lighting are required.

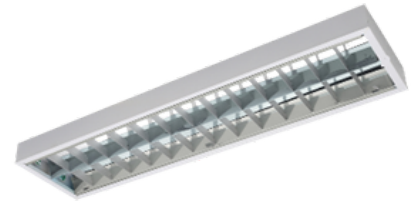

Specification

Housing:	Die-formed cold-rolled steel sheet 0.6 mm thickness
Finishing:	Polyester powder coated
Reflector:	99.85% high-purity anodized aluminium reflector with 87% reflectance (95% optional)
Louver:	Anodized aluminium louver with Christmas tree profile for glare control
Mounting:	Surface and suspension rod mounting
Lamp Holder:	G5 rotary lock types with TIS standard
Wiring:	THW 1.0 sqmm with TIS standard
Light Source:	LED T5 Lamps
IP Rating:	IP20

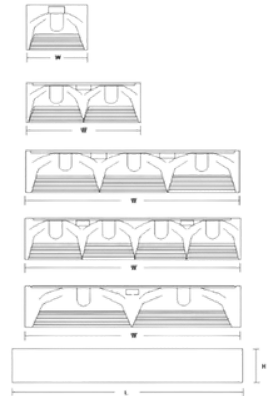

Model	Light Source	Dimensions (mm)		
		W	L	H
TO-114L	1 x LED T5 L 600 mm	150	565	77
TO-114LX	1 x LED T5 L 600 mm	300	565	77
TO-214L	2 x LED T5 L 600 mm	300	565	77
TO-214LX	2 x LED T5 L 600 mm	300	565	77
TO-314L	3 x LED T5 L 600 mm	600	565	77
TO-414L	4 x LED T5 L 600 mm	600	565	77
TO-128L	1 x LED T5 L 1200 mm	150	1172	77
TO-128LX	1 x LED T5 L 1200 mm	300	1172	77
TO-228L	2 x LED T5 L 1200 mm	300	1172	77
TO-228LX	2 x LED T5 L 1200 mm	600	1172	77
TO-328L	3 x LED T5 L 1200 mm	600	1172	77
TO-428L	4 x LED T5 L 1200 mm	600	1172	77