


Application

Recess Profile Mirror Louver luminaires are suitable for offices, schools, hospitals, and commercial spaces where high illumination levels, energy efficiency, glare control, and uniform lighting are required.



Specification

- Housing:** Die-formed cold-rolled steel sheet 0.6 mm thickness
- Finishing:** Polyester powder coated
- Reflector:** Mirror anodized aluminium reflector with 87% reflectance (95% optional)
- Louver:** Anodized aluminium louver with Christmas tree profile for glare control
- Mounting:** Recessed mounting for T-bar ceiling and gypsum ceiling
- Lamp Holder:** G5 rotary lock types with TIS standard
- Wiring:** THW 1.0 sqmm with TIS standard
- Light Source:** LED T5 Lamps
- IP Rating:** IP20

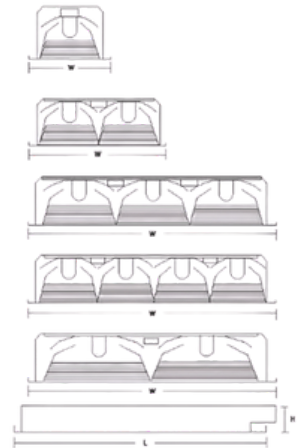

Model	Light Source	Dimensions (mm)		
		W	L	H
TM-114L	1 x LED T8 L 600 mm	150	575	77
TM-114LX	1 x LED T8 L 600 mm	297	575	77
TM-214L	2 x LED T8 L 600 mm	297	575	77
TM-214LX	2 x LED T8 L 600 mm	597	575	77
TM-314L	3 x LED T8 L 600 mm	597	575	77
TM-414L	4 x LED T8 L 600 mm	597	575	77
TM-128L	1 x LED T8 L 1200 mm	150	1175	77
TM-128LX	1 x LED T8 L 1200 mm	297	1175	77
TM-228L	2 x LED T8 L 1200 mm	297	1175	77
TM-228LX	2 x LED T8 L 1200 mm	597	1175	77
TM-328L	3 x LED T8 L 1200 mm	597	1175	77
TM-428L	4 x LED T8 L 1200 mm	597	1175	77