
TEI EXPLOSION RROOF

TEXP-FW



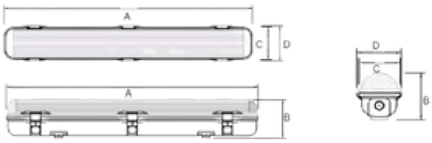

Application

The ATEX/IECEx Zone 2 certified Explosion-proof Luminaire provides high-performance illumination for hazardous industrial environments, including petrochemical plants, oil refineries and chemical facilities.

Specification

Body and cover : Polycarbonate
Clips : Stainless steel

Marking for test : Ex II3G
Degree of Protection : IP54/65 (option) acc. To IEC 60529
Ambient Temp. (Ta) : -20°C to + 55°C
Rated Voltage : 220-240V. AC 50/60Hz
Ballast : Electronic ballast

Power factor cos : P.F. ≥0.98
Protection class for UL. : Class I, Division 1or 2 Group. C,D
Class II, Division 1 or 2 Groups. E,F,G
Class III

Protection class for IEC : Zone 2 , 21& 22

Type	Power (W)
T8	1 x 18 W 1 x 36 W 2 x 18 W 2 x 36 W
LED	1 x 8 W 1 x 14 W 1 x 28 W 2 x 8 W 2 x 14 W 2 x 28 W