
TEI EXPLOSION RROOF

TEXPG-TS







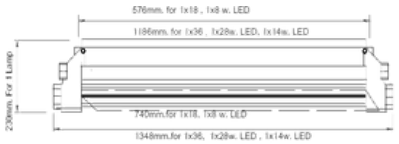



Application

The ATEX/IECEx Zone 1 & 2 certified Explosion-proof Luminaire provides high-performance illumination for hazardous industrial environments, including petrochemical plants, oil refineries and chemical facilities.

Specification

Body and cover : Marine grade copper-free aluminium alloy
with epoxy-polyester powder coated , RAL7032 (GREY)
Transparent cover : Borosilicate - glass
Reflector : High grade aluminium anodized reflector
Sealing gasket : Silicone - 40°C to + 175°C

Explosion Protection : Ex de IIB T6
Conforming to : Standards IEC 60079-0/1 or UL 60079-1
Marking for test : Ex II2G
Degree of Protection : IP54/65 (option) acc. To IEC 60529
Ambient Temp. (Ta) : -20°C to + 55°C
Rated Voltage : 220-240V. AC 50/60Hz
Ballast : Electronic ballast

Enclosure entry holes : Direct entry 2 x 3/4" NPT.
Power factor cos : P.F. ≥0.98
Protection class for UL. :
Class I, Division 1or 2 Group. C,D
Class II, Division 1 or 2 Groups. E,F,G,
Class III

Protection class for IEC : Zone1 , 21 and Zone 2 , 22
Complete with : Fixture haggle box 2 way 2x3/4" (DCHC22)
Ceiling Saddle 1x3/4" (VH2)

Options :
Adding suffix to Cat. No.
Stainless steel wire guard - G
Gasket seal at cover part Type S for IP65

Type	Power (W)
T8	1 x 18 W
	1 x 36 W
	2 x 18 W
	2 x 36 W
	3 x 18 W
	3 x 36 W
LED	1 x 8 W
	1 x 14 W
	1 x 28 W
	2 x 8 W
	2 x 14 W
	2 x 28 W
	3 x 8 W
	3 x 14 W
	3 x 28 W