
TEI LED Street Light

TRL-20-60P



Application

Streetlight luminaires are suitable for residences, streets, parking lots, industrial zones, highways, expressways, and other outdoor environments.

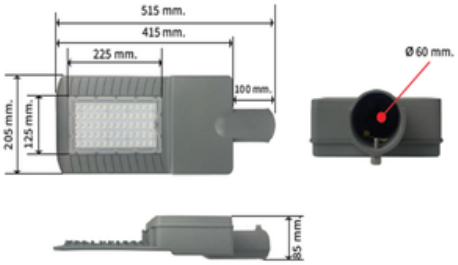

Specification

Housing: Die-cast Aluminium

Finishing: Powder Coated in grey

Surge Protection: 10 kV

Input Voltage: 100–240 VAC, 50/60 Hz

Beam Angle: 70° / 150°

Power Factor: >0.95

Op. Temp: -10°C to +65°C

CCT: 2700K (Warm White), 3000K (Warm White), 4000K (Cool White), 5000K (Cool Daylight), 6000K (Daylight)

Lens Material: Polycarbonate

LED Light Source: Lumileds / Everlight

CRI: >70

LED Lifetime: 50,000 hrs

Driver: Moso / Sosen

IP Rating: IP65

Model	Power (W)	Luminaire Efficiency (lm)	Efficiency (lm/W)	Size W x L x H x Ø (mm)
TRL-20P	20	2,700	135	205 x 85 x 515 x 60
TRL-30P	30	4,050	135	205 x 85 x 515 x 60
TRL-38P	38	5,130	135	205 x 85 x 515 x 60
TRL-40P	40	5,400	135	205 x 85 x 515 x 60
TRL-50P	50	6,750	135	205 x 85 x 515 x 60
TRL-60P	60	8,100	135	205 x 85 x 515 x 60