
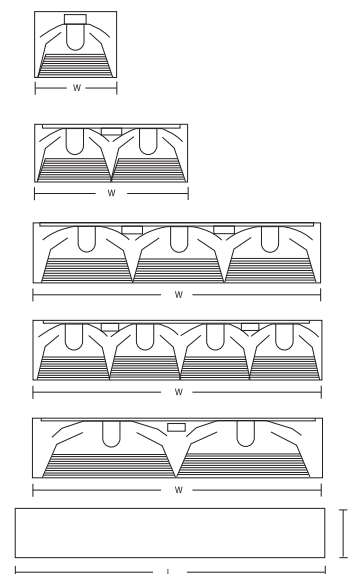


FLUORESCENT T8

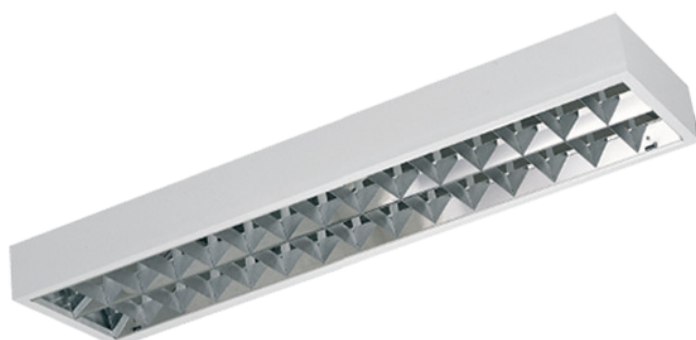

SURFACE PROFILE MIRROR LOUVER

APPLICATIONS

- OFFICES AND COMMERCIAL BUILDING AND SCHOOLS.
- OTHER INDOOR APPLICATIONS WHERE LOW GLARE, WIDE LIGHT DISTRIBUTION AND ENERGY EFFICIENCY ARE REQUIRED.

SPECIFICATION FEATURES

- DIE-FORMED COLD-ROLLED STEEL 0.6MM. STEEL THICKNESS.
- FIVE-STAGES PHOSPHATE PRETREATMENT COATING TO ENSURE SUPERIOR PAINT ADHESION AND RUST RESISTANCE.
- FINISHED WITH HIGH GLOSSY, BAKED WHITE POLYESTER POWDER.
- THW 0.5 SQMM. WIRING CABLE
- G13 ROTARY SPRING LOCKED LAMPHOLDER AND SEPARATED STARTER HOLDER.

REFLECTOR

- 99.85% PURITY ANODIZED ALUMINIUM REFLECTOR TO PROVIDE TOTAL REFLECTANCE 87%.
- CHRISTMAS TREE PROFILES FOR TRANSVERSAL TO ANTI-GLARE.

INSTALLATION

- AVAILABLE IN SURFACE AND SUSPENSION ROD MOUNTING.

MODEL	LAMP	WIDE (W)	LONG (L)	HIGH (H)	PRICE (Baht)	COMPLETE SET
TO-12L	1 x 18W.	150	615	80	900	1,140
TO-22L	2 x 18W.	295	615	85	1,100	1,580
TO-32L	3 x 18W.	615	615	85	1,500	2,220
TO-42L	4 x 18W.	615	615	85	1,700	2,660
TO-12LX	1 x 18W.	295	615	85	1,100	1,340
TO-22LX	2 x 18W.	615	615	85	1,500	1,980
TO-14L	1 x 36W.	150	1220	80	1,200	1,440
TO-24L	2 x 36W.	295	1220	85	1,500	1,980
TO-34L	3 x 36W.	615	1220	85	2,500	3,220
TO-44L	4 x 36W.	615	1220	85	2,700	3,660
TO-14LX	1 x 36W.	295	1220	85	1,500	1,740
TO-24LX	2 x 36W.	615	1220	85	2,500	2,985